

PRESIDENT

ALL EUROPEAN STANDARDS

new

WALKER
ASC



- ➡ microphone up and down
- ➡ mike jack on front panel
- ➡ ...

*We have the JOHNNY and the WALKER....
but still not the whisky*!!!!*


** The excessive use of CB radio is not dangerous for your health*

Groupe
PRESIDENT
ELECTRONICS

Siège Social / Head Office – France – Route de Sète – BP 100 – 34540 BALARUC
Site Internet : <http://www.president-electronics.com> – e-mail : groupe@president-electronics.com



0733/10-02 C0103

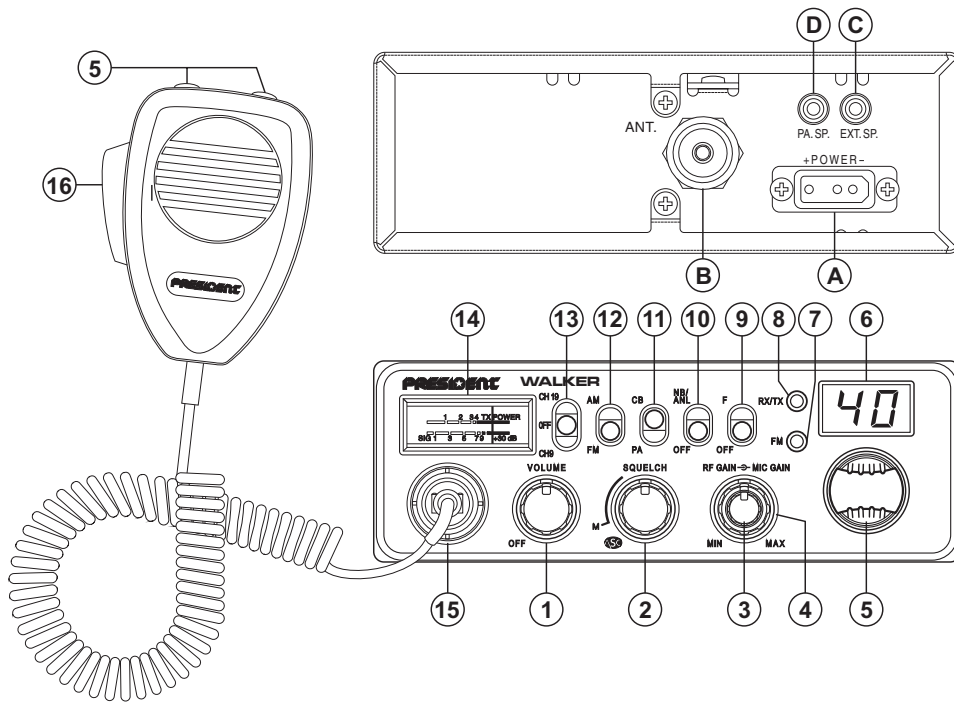

- A) DC-POWER TERMINAL (13.2 V)
- B) ANTENNA CONNECTOR (SO-239)
- C) EXTERNAL SPEAKER JACK (8 Ω, Ø 3.5 mm)
- D) PA SPEAKER JACK (8 Ω, Ø 3.5 mm)

- 1) ON/OFF - VOLUME
- 2) ASC (Automatic Squelch Control) / SQUELCH
- 3) RF GAIN
- 4) MIC GAIN
- 5) CHANNEL SELECTOR
- 6) DISPLAY
- 7) FM LED
- 8) RX/TX LED
- 9) FREQUENCY BAND SELECTION
- 10) NB/ANL
- 11) CB/PA (Public Address)
- 12) MODE
- 13) CH 19 / CH 9
- 14) BARGRAPH
- 15) 6-PIN MICROPHONE PLUG
- 16) PTT (push to talk)

Specifications

WALKER

40 channels
AM / FM
ASC



1) GENERAL:

- Channels : 40
- Modulation modes : AM/FM
- Frequency ranges : from 26.965 MHz to 27.405 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V
- Dimensions (in mm) : 160 (L) x 160 (H) x 55 (D)
- Weight : 1.1 kg
- Accessories supplied : microphone UP/DOWN with support, mounting cradle, screws and fused power cord.

2) TRANSMISSION:

- Frequency allowance : +/- 300 Hz
- Carrier power : 1 watts AM / 4 W FM
- Transmission interference : inferior to 4 nW (-54 dBm)
- Audio response : 300 Hz to 3 kHz in AM/FM
- Emitted power in the adj. channel : inferior to 20 μW
- Microphone sensitivity : 3.0 mV
- Drain : 2 A (with modulation)
- Modulated signal distortion : 1.8 %

3) RECEPTION:

- Maxi. sensitivity at 20 dB sinad : 0.5 μV - 113 dBm (AM/FM)
- Frequency response : 300 Hz to 3 kHz in AM/FM
- Adjacent channel selectivity : 60 dB
- Maximum audio power : 5 W
- Squelch sensitivity : minimum 0.2 μV - 120 dBm
maximum 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rej. rate : 70 dB
- Drain : 400 mA nominal / 1500 mA maximum